



Table Runner



This pattern may not be republished or distributed without explicit permission by the author. Quilts made with this pattern may not be sold. When displayed publicly (e.g. on social media, in exhibitions, ...), the author "Fingingo & Pumpuin by Miriam Laurentzsch" must be explicitly and visibly named. If linking is possible, it must be done.



Material:


- Three quilt tops measuring 16.5" x 16.5"
- Thread to match the background fabric
- Batting (cotton batting 80/20 recommended) measuring 18" x 18"
- One finished pillow blank (35 cm x 35 cm)

Nähen:

STEP 1 – CUTTING

Cut the following pieces:


- For table runner T1 (48" x 16"):
You do not need to cut any additional pieces.
- For table runner T2 (53" x 16"):
N: 2c [3" x 16.5"] strips from the background fabric
- For table runner T3 (59" x 16"):
N: 2x [3" x 16.5"] strips from the background fabric
O: 2x [3.5" x 16.5"] strips from the background fabric

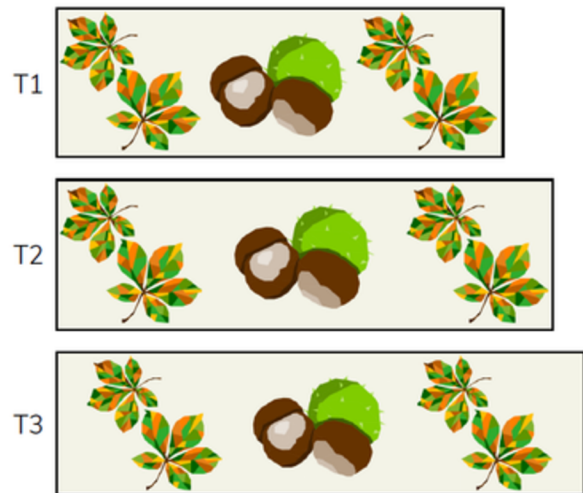

STEP 2 – SEWING


For **table runner T1 (48" x 16")**:

- Place the middle block right sides together on top of the left block and sew them together with a 0.25" seam allowance.
- Place the right block right sides together on top of the middle block and sew them together with a 0.25" seam allowance.
- Press the seam allowances apart.

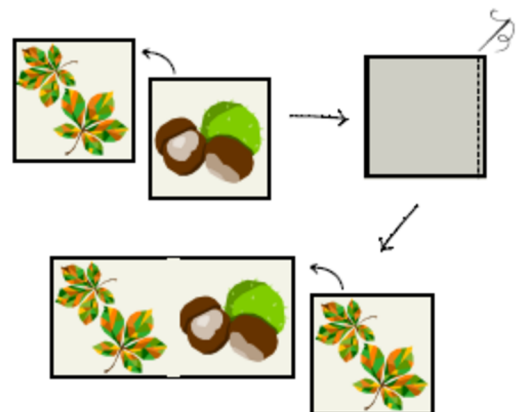

For **table runner T2 (53" x 16")**:

- Place block N right sides together on the left block and sew them together with a 0.25" seam allowance.
- Place the middle block right sides together on block N and sew them together with a 0.25" seam allowance.
- Place block N right sides together on top of the middle block and sew them together with a 0.25" seam allowance.
- Place the right block right sides together on top of block N and sew them together with a 0.25" seam allowance.
- Press the seam allowances apart.

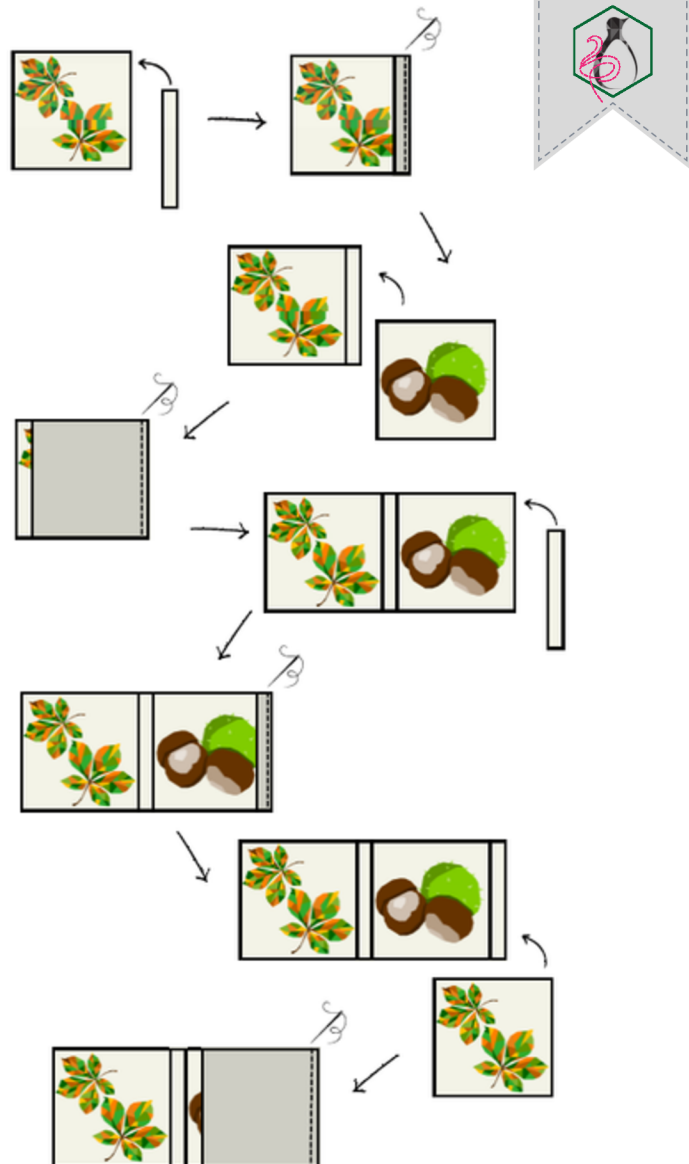

For **table runner T3 (59" x 16")**:

- Place block O right sides together on block N and sew together with a 0.25" seam allowance.
- Place block N right sides together on block O and sew together with a 0.25" seam allowance.
- Place the middle block right sides together on top of block N and sew them together with a 0.25" seam allowance.
- Place block N right sides together on top of the middle block and sew them together with a 0.25" seam allowance.
- Place the right block right sides together on top of block N and sew them together with a 0.25" seam allowance.
- Place block O right sides together on top of the right block and sew them together with a 0.25" seam allowance.
- Press the seam allowances apart.

